

FEATURES

FT5162, FT6203 & FT6203CC

FAST TRAX

- Handheld remote controls come as standard.
- Allowing operators to control the plant from a loader or control house up to 300 feet away from the plant.



HANDHELD REMOTE CONTROL

- Proven design reduces carry over and material contamination.
- High capacity screen delivers consistent travel speed for increased separation, longer stroke for reduced blinding and on-the-fly variable speed control.



HORIZONTAL SCREEN

- All side delivery conveyors fold away for travel.
- Large product pile away from the plant for easy removal. Conveniently fold away via hydraulic control for travel. Everything is hauled in one load.



SIDE DELIVERY CONVEYORS

- Heavy duty and versatile belt feeder.
- Can be directly shovel fed while operating alone or integrated into a track system and fed by another Fast Track® plant.



ADJUSTABLE BELT FEEDER

- The bogey system reduces the reliance on special low boy trailers.
- Provides safer, quicker mobilization with attractive ROI as compared to investing in a special transport trailer or trying to find a carrier with the right trailer.



BOGEY SYSTEM

YOUR ONE SOURCE



www.kpijci.com

SPECIFICATIONS

FT5162

FAST TRAX

FT5162		
DIMENSIONS	Transport	Operating
A (Overall Length)	56 ft 3 in (17.150 m)	51 ft 1 in (15.570 m)
B (Overall Height)	11 ft 2 in (3.400 m)	15 ft 11 in (4.850 m)
C (Overall Width)	11 ft 5 in (3.480 m)	30 ft 11 in (9.420 m)
WEIGHT	63,000 lbs (28576 kg)	
FEEDER		
Type	36" Apron or 42" Belt	
Hopper Volume	7 cu/yd (5.4 m ³)	
SCREEN		
Type	Horizontal, Medium Scalper, two deck	
Size	5 ft x 16 ft (1524 mm x 4.876 m)	
Drive	Hydraulic	
SIDE DISCHARGE CONVEYORS		
Quantity	2	
Width	24.5 in (622 mm)	
Discharge Height	10 ft 7 in (3.226 m)	
TOP DECK OVERS CONVEYOR		
Width	36 in (914 mm)	
Discharge Height	11 ft 2 in (3.404 m)	
TRACKS		
Length	13 ft 3 in (4.040 m)	
Shoe Width	20 in (508 mm)	
ENGINE		
Type	Tier III	
Manufacturer	CAT	
Rating	173 hp (130 kw)	
Fuel Capacity	200 gal (757 l)	
HYDRAULIC		
Oil Capacity	200 gal (757 l)	
PERFORMANCE		
Maximum Feed Size	14 in (356 mm)	
Capacity up to	325 tph (295 mtph)	
OPTIONS		
<ul style="list-style-type: none"> • 5162-32LP "low profile" screen in lieu of Medium Scalper (10" Max feed size) • 5162-32HS Heavy Scalper in lieu of Medium Scalper (18" max feed size) • HD Apron Feeder in lieu of belt Feeder 36" x 12' Apron Feeder – FL6 hydraulic gear motor variable speed drive, heavy-duty hopper 		




SPECIFICATIONS

FT6203

FAST TRAX

FT6203		
DIMENSIONS	Transport	Operating
A (Overall Length)	68 ft 11 in (21.000 m)	65 ft 7 in (20.000 m)
B (Overall Height)	12 ft 0 in (3.660 m)	15 ft 4 in (4.670 m)
C (Overall Width)	12 ft 0 in (3.660 m)	51 ft 1 in (15.570 m)
WEIGHT	83,000 lbs (37648 kg)	
FEEDER		
Type	48" Belt	
Hopper Volume	5 cu/yd (3.8 m ³)	
SCREEN		
Type	Horizontal	
Size	6 ft x 20 ft (1829 mm x 3.658 m)	
Drive	Hydraulic	
SIDE DISCHARGE CONVEYOR		
Width	30 in (762 mm)	
Discharge Height	11 ft 7 in (3.531 m)	
TOP DECK OVERS CONVEYOR		
Width	42 in (1067 mm)	
Discharge Height	10 ft 7 in (3.226 m)	
TRACKS		
Length	13 ft 3 in (4.040 m)	
Shoe Width	20 in (500 mm)	
ENGINE		
Type	Tier III	
Manufacturer	CAT	
Rating	173 hp (130 kw)	
Fuel Capacity	150 gal (568 l)	
HYDRAULIC		
Oil Capacity	200 gal (757 l)	
PERFORMANCE		
Maximum Feed Size	10 in (254 mm)	
Capacity up to	800 tph (726 mtph)	
OPTIONS	<ul style="list-style-type: none"> • Tri-axle transport dolly includes four (4) hydraulic stabilizers, king pin and travel lights to allow mobilization without trailer • 6' discharge height for side discharge conveyors • Auxiliary hydraulic power for two (2) off-plant conveyors • Side discharge conveyors – HD impact bed in loading area • Hydraulic stabilizers to support feed end of plant • Manual stabilizers to support feed end of plant • Removable rear hopper wall • Belt cleaners for all conveyors • Grizzly section over feeder 	

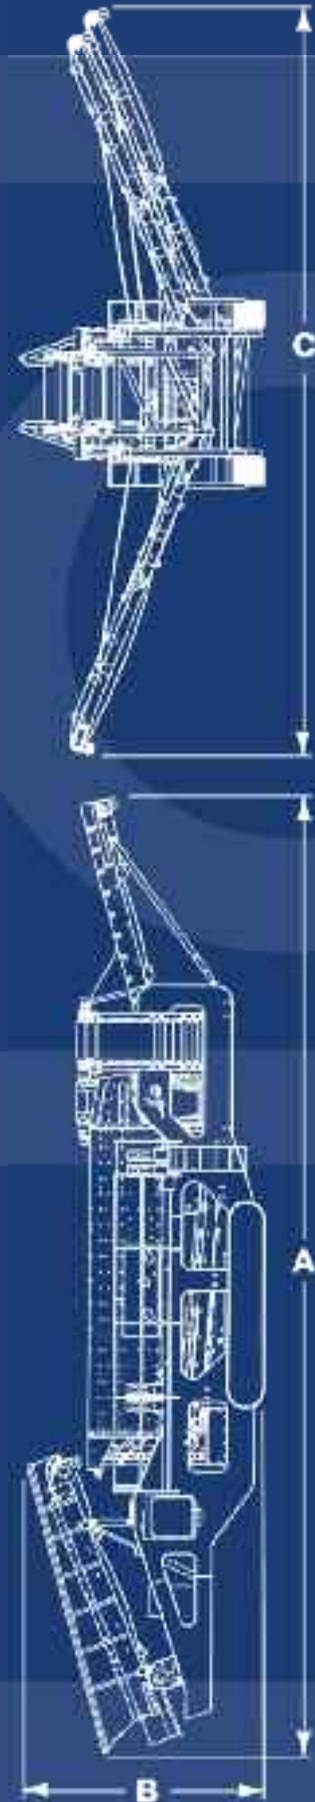

SPECIFICATIONS

FT6203CC

FAST TRAX

FT6203CC		
DIMENSIONS	Transport	Operating
A (Overall Length)	57 ft 6 in (17.530 m)	65 ft 7 in (20.000 m)
B (Overall Height)	12 ft 0 in (3.660 m)	15 ft 6 in (4.720 m)
C (Overall Width)	12 ft 0 in (3.660 m)	71 ft 0 in (21.640 m)
WEIGHT	72,000 lbs (32659 kg)	
FEEDER	42" Over Head Feed Conveyor	
SCREEN	Horizontal, three deck	
Type	Horizontal, three deck	
Size	6 ft x 20 ft (1829 mm x 3.658 m)	
Drive	Hydraulic	
SIDE DISCHARGE CONVEYOR		
Width	30 in (762 mm)	
Discharge Height	8 ft 10 in (2692 mm)	
TOP DECK OVERS SCREEN		
Width	36 in (914 mm)	
Discharge Height	8 ft 10 in adjustable (2692 mm)	
TRACKS		
Length	13 ft 3 in (4.040 m)	
Shoe Width	20 in (508 mm)	
ENGINE		
Type	Diesel, Tier III	
Manufacturer	CAT	
Rating	173 hp (130 kw)	
Fuel Capacity	100 gal (379 l)	
HYDRAULIC		
Oil Capacity	200 gal (757 l)	
PERFORMANCE		
Maximum Feed Size	10 in (254 mm)	
Capacity up to	800 tph (726 mtph)	
OPTIONS		
	<ul style="list-style-type: none"> • Auxiliary hydraulic power to drive two (2) off-plant conveyors • Side discharge conveyors – HD impact bed in loading area • Belt cleaners for all conveyors 	

**FOR MORE INFORMATION CONTACT YOUR LOCAL DEALER
AND ASK FOR A KPI-JCI EQUIPMENT SPECIALIST**

YOUR AUTHORIZED DEALER:

NOTE: SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

REV. 1 7/07

Because KPI-JCI may use in its catalog & literature, field photographs of its products which may have been modified by the owners, products furnished by KPI-JCI may not necessarily be as illustrated therein. Also continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of KPI-JCI are subject to the provisions of its standard warranty. KPI-JCI does not warrant or represent that its products meet any federal, state, or local statutes, codes, ordinances, rules, standards or other regulations, including OSHA and MSHA, covering safety pollution, electrical, wiring, etc. Compliance with these statutes and regulations is the responsibility of the user and will be dependent upon the area and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and other safety equipment is often dependent upon the area and the use to which the product is put. A safety study should be made by the user of the application, and, if required, additional guards, warning signs and other safety devices should be installed by the user, wherever appropriate before operating the products.



KOLBERG-PIONEER
700 W 21st Street
Yankton, SD 57078 USA
800.542.9311 FAX 605.665.8858



www.kpijci.com

JOHNSON CRUSHERS
86470 Franklin Blvd.
Eugene, OR 97405 USA
800.314.4656 FAX 541.736.1424